


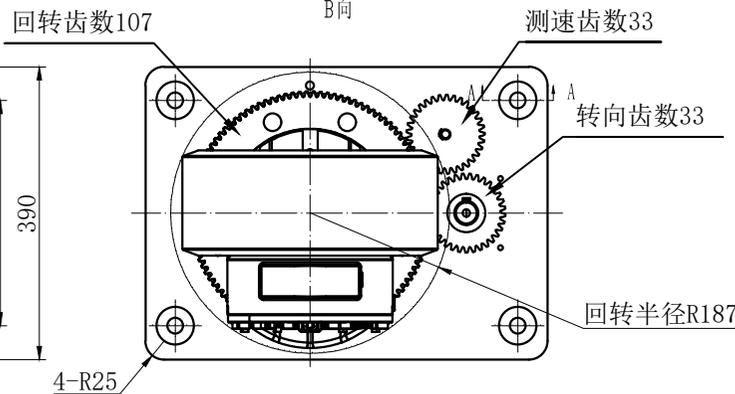
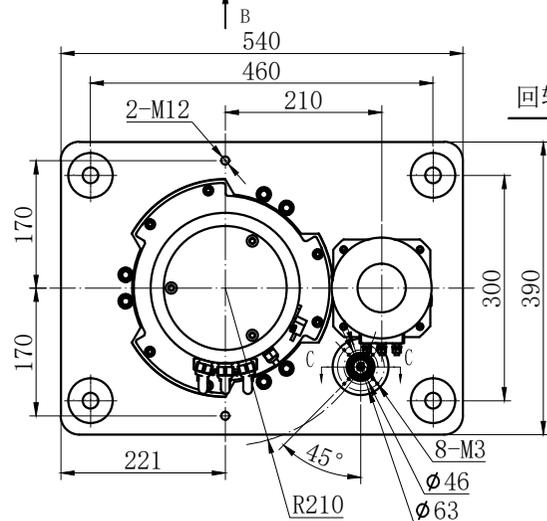




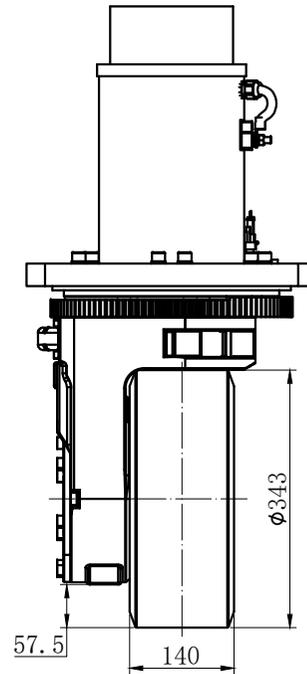


TEC-343-VS

TEC-343P6500A-20.2-48VS-2

交流异步电机驱动轮单元

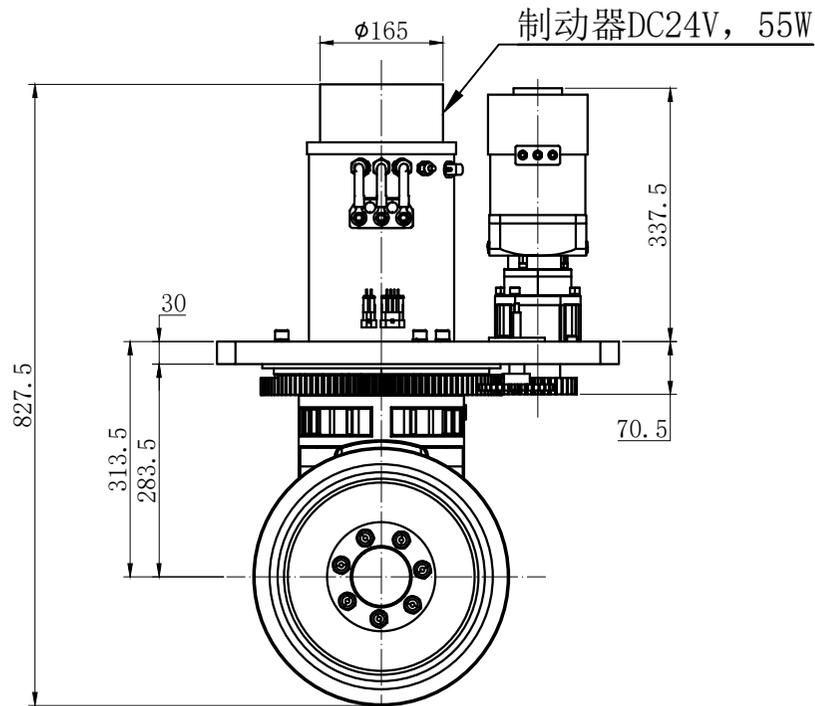

温度传感器
(KTY84-150)
接插器: 282104-1
适配接插器: 282080-1



内置64位编码器(行走)
接插器: 282106-1
适配接插器: 282088-1



内置64位编码器(转向)
接插器: 282106-1
适配接插器: 282088-1

牵引电机数据	
类型: 交流异步电机	
功率	W 6500
额定电压	V 48
转速	Rpm 2800
电流	A 180
扭矩	Nm 23
IP防护等级	IP 44

牵引变速箱	
传动比	I 20.2
最大加速和制动扭矩	Nm 988
额定车轮输出扭矩	Nm 395
聚氨酯轮最大载荷	Kg 3200
制动力矩	Nm 60
润滑	润滑油

转向电机数据	
类型: 交流异步电机	
功率	W 1200
额定电压	V 48
转速	Rpm 3000
电流	A 33
电机扭矩	Nm 3.82
传动比	I 50
齿轮输出扭矩	Nm 191
IP防护等级	IP 44
润滑	润滑油

总重量	Kg 204.6
-----	----------

公司	江苏亿控智能装备有限公司	
网址	https://www.yikongzhineng.com/	
设计:ZZH	日期:2023.5.22	
工艺:		
审核:	批准:	